

TUMBLE DRYERS

DESIGNED TO MEET ALL NEEDS

DD28 SILVER/BRONZE
DD35 SILVER/BRONZE

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Transmission by pulley and belt, with inverter.
- Front subsection by 2 strong and high-resistant wheels.
- **DD BRONZE range:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **DD SILVER range:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- **REVERSING DRUM:** All models offer the reverse turning of the drum.
- **STAINLESS STEEL DRUM** standard.
- **DOUBLE FLOW:** Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- **GENTLE DRY:** The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- **Cool Down:** Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** SILVER range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepay card systems. Electric and gas heated models.




OPTIONS

- **CARE DRY:** Intelligent Moisture Control. (SILVER range).
- **SPRINKLER:** Integrated Fire Extinguishing System. (SILVER range).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TECHNICAL DATA	UNIT.	DD28 SILVER/BRONZE	DD35 SILVER/BRONZE		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	27	33		
Hourly Output SILVER/BRONZE	Kg/h	55	66		
Evaporation capacity SILVER/BRONZE	l/h	28,6	34,3		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power SILVER/BRONZE	Kw	0,55	0,55		
Total Installed power SILVER/BRONZE	Kw	31,15	37,15		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Calef. gas (Potencia el. instalada) SILVER/BRONZE	Kw	1,15	1,15		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power) SILVER/BRONZE	Kw	1,15	1,15		
CONNECTIONS					
		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1065		985/1065	
Depth / Depth	mm	1054/1154		1210/1310	
Height / Height	mm	1946/2080		1946/2080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow SILVER/BRONZE	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Noise level SILVER/BRONZE	dB	65		65	

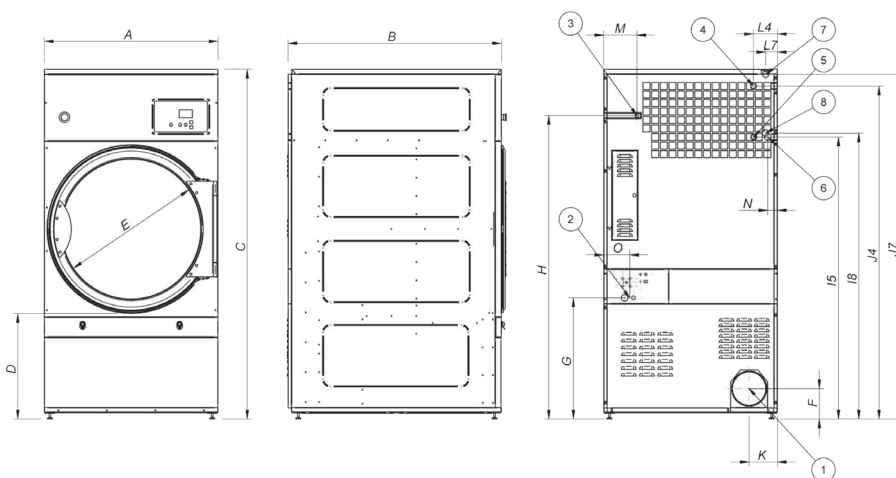

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection galva battery
- 05. Condensation outlet galva battery
- 06. Anti fire water valve
- 07. Steam connection stainless battery
- 08. Condensation outlet stainless battery

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
DD28	985	1054	1946	577	802	172	685	1715	1594	-	1883	-	160	134	-	188	55	148
DD35	985	1210	1946	577	802	172	685	1715	1594	1616	1883	1948	160	134	67	188	55	690